

# Delta 30

### Product Specifications

Rigid

<b>Material</b>	AISI Type 316 SS
<b>Open Area</b>	64%
<b>Weight</b>	1.05 lbs/sqft
<b>Max. width</b>	101"

> 8 ft in both directions must ship flat - contact GKD for larger size restrictions

### System Components

- Ceiling Clip System
- Flat & angle
- Flats with clevis
- Frame
- U-binding frame

### Applications

- Metal Mesh Ceiling Panels
- Partitions


### North American Headquarters

North America  
 GKDMETALFABRICS  
 825 Chesapeake Drive  
 Cambridge MD 21613  
 Direct: 410.901.8428 or  
 410.901.8429  
 metalfabrics@gkdusa.com




SUNSHADING

Please refer to page 2 for Solar Control Data

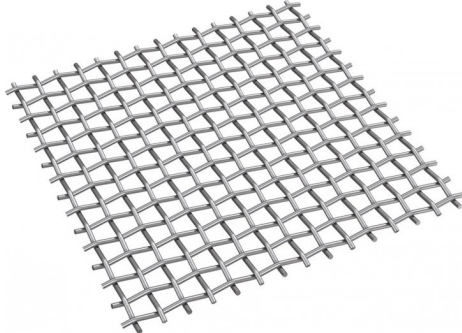

← Width →

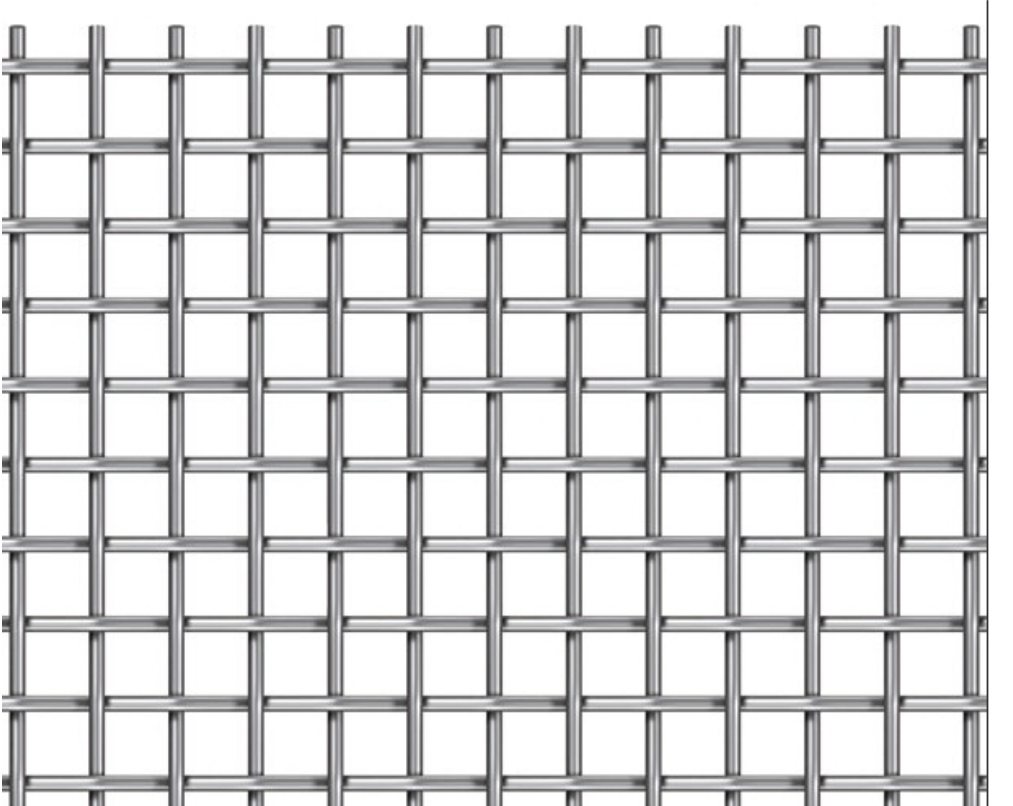

Inches 0 .5 1



GKD-USA offers a complete sunshade technical program. Our engineering team works with you to provide an assessment and application analysis to your specific need or project. GKD Metal Fabric Sunshading Façades offer significant energy saving, comfort, and a pleasant work environment by filtering light and providing transparent views to the outside.


### North American Headquarters

North America  
GKDMETALFABRICS  
825 Chesapeake Drive  
Cambridge MD 21613  
Direct: 410.901.8428 or  
410.901.8429  
metalfabrics@gkdusa.com



## Solar Control Data

<b>Percentage of Visible Light Transmittance</b>	Minimum 0.63, Maximum 0.74
<b>Percentage of Visible Light Reflectance</b>	Minimum 0.11, Maximum 0.13
<b>Solar Gain Coefficient (SHGC)</b>	Minimum 0.43, Maximum 0.50

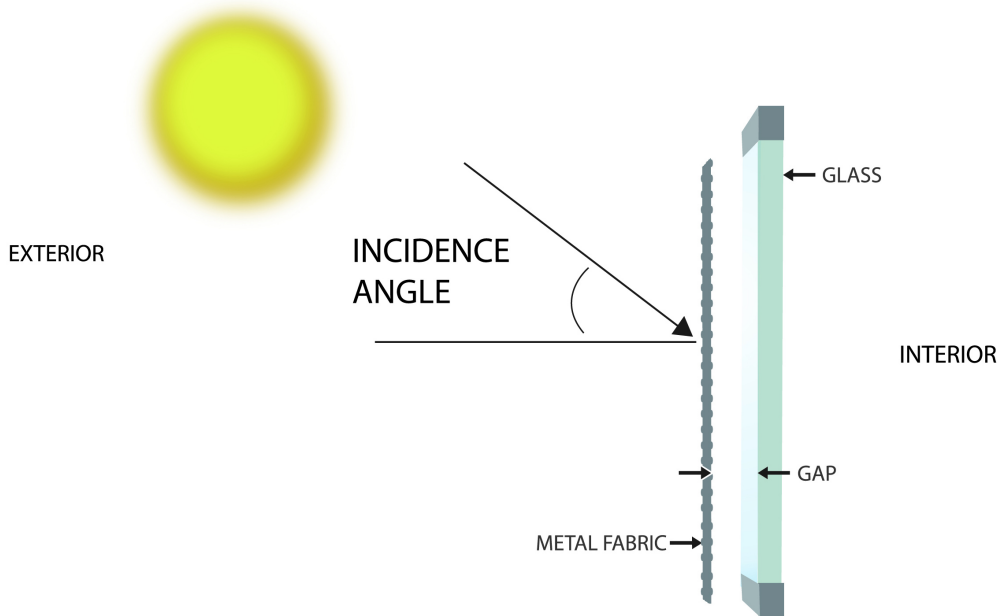

### SOLAR CONTROL DATA NOTES:

Test per EN 410 "Glass in building - Determination of luminous and solar characteristics of glazing"  
SHGC per EN 13363-1 "Solar protection devices combined with glazing - calculation of solar and light transmittance"  
Glazing system constants:  $U_{glazing} = 1.2 \text{ W/m}^2\text{K}$ ,  $g_{glazing} = 0.60$   
TV<sub>tot</sub> = visible light transmittance  
PV<sub>tot</sub> = visible light reflectance  
gtot = Solar Heat Gain Coefficient (SHGC)