

Product Specifications

Flexible, one direction

| | |
|-----------------------------|------------------|
| Material | AISI Type 316 SS |
| Open Area | 57% |
| Weight | 1.83 lbs/sqft |
| Nominal Thickness | 0.875" |
| Cable | 0.075" x 3 |
| Rod | 0.115" |
| C - C cable | 100 mm |
| Max. width | 13' |
| Max. length | Consult GKD |
| Vertical LED Pitch | 50 mm |
| Horizontal LED Pitch | 50 mm |
| NITS | 7000 |
| Viewing Distance | ~115' |

System Components

Eyebolt
WIB - eyebolts top and bottom

Applications

Mediamesh®


North American Headquarters

North America
GKDMETALFABRICS
825 Chesapeake Drive
Cambridge MD 21613
Direct: 410.901.8428 or
410.901.8429
metalfabrics@gkdusa.com



Mediamesh values shown here are based on a standard configuration of pixel pitches. Not to scale.

Mediamesh is protected under patent 7,513,644 B2. Other patents may apply.

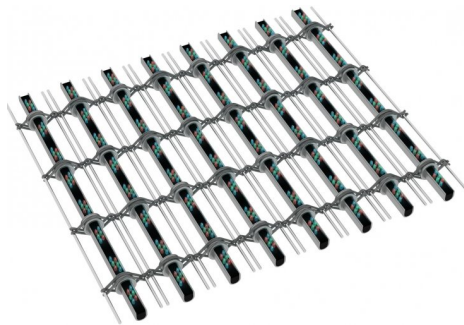

← Width →

